



Universal Compatibility and 6063 Alloy Aluminum Heatsink with Customized Surface Treatmentment

Our Product Introduction

for more products please visit us on alu-heatsink.com


Basic Information

- Place of Origin: China, Guangdong
- Brand Name: No Brand
- Packaging Details: protect film
- Delivery Time: 15-30days
- Payment Terms: L/C, T/T




Product Specification

- Alloy: 6063
- Thermal Conductivity: High
- Durability: High
- Sample Leadtime: 15 Days
- Dimensions: Various Sizes Available
- Sample: Available
- Surface Treatmentment: Anodized, Customized
- Mounting Type: Vertical
- Highlight: 6063 Aluminum Heatsink,
Customized Surface Treatmentment Aluminum
Heatsink
, 6063 Alloy Aluminum Heatsink

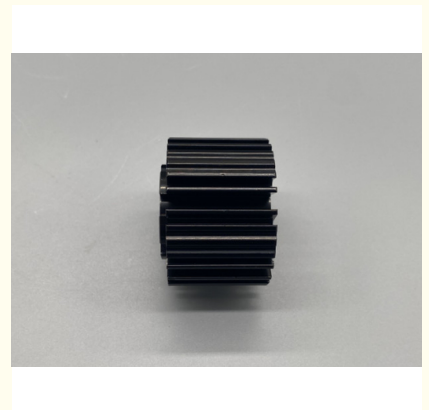

More Images



Product Description

Product Description:

Welcome to our product summary for the Aluminum Heatsink, designed to enhance the performance and longevity of LED lighting systems. This high-quality heatsink boasts exceptional thermal conductivity, making it an ideal choice for applications where heat dissipation is crucial.

The Aluminum Heatsink features a vertical mounting type, providing a reliable and secure installation option for LED lighting setups. With a sample lead time of 15 days, you can quickly evaluate the effectiveness of this heatsink in your specific project requirements.

For enhanced durability and longevity, the Aluminum Heatsink is constructed to withstand demanding conditions, ensuring consistent performance over an extended period. The surface treatment of this heatsink includes anodized finish, which not only enhances its visual appeal but also provides protection against corrosion and wear. Additionally, customization options are available to meet your specific design preferences and requirements.

Designed to meet the stringent demands of LED lighting applications, this Aluminum Heatsink offers high thermal conductivity to efficiently dissipate heat generated by LED modules. By effectively managing heat, this heatsink helps maintain optimal operating temperatures for LED lighting systems, ensuring reliable performance and longevity.

Whether you are designing LED luminaires for commercial, industrial, or residential settings, the Aluminum Heatsink is a versatile solution that can support various LED lighting configurations. Its high thermal conductivity allows for efficient heat transfer, preventing overheating and ensuring the longevity of LED modules.

With its vertical mounting type, the Aluminum Heatsink provides a secure attachment method for LED modules, minimizing the risk of movement or instability. This robust mounting design ensures that the heatsink remains firmly in place, even in challenging environments or applications.

Thanks to its anodized surface treatment, the Aluminum Heatsink not only looks sleek and professional but also offers enhanced protection against environmental factors. The anodized finish adds a layer of durability to the heatsink, making it resistant to corrosion, scratches, and other forms of damage.

Customization options for the surface treatment of the Aluminum Heatsink allow you to personalize the appearance of the heatsink to align with your project's aesthetic requirements. Whether you prefer a specific color or finish, our customization services can cater to your unique preferences.

In summary, the Aluminum Heatsink is a high-quality solution for effectively managing heat in LED lighting applications. With its high thermal conductivity, vertical mounting type, 15-day sample lead time, anodized surface treatment, and customizable options, this heatsink is a reliable choice for enhancing the performance and longevity of LED lighting systems.

Features:

Product Name: Aluminum Heatsink

Durability: High

Dimensions: Various Sizes Available

Thermal Conductivity: High

Sample Leadtime: 15 Days

Sample: Available

Technical Parameters:

Thermal Conductivity	High
Sample	Available
Surface Treatment	Anodized, Customized
Alloy	6063
Mounting Type	Vertical
Durability	High
Sample Leadtime	15 Days
Compatibility	Universal
Dimensions	Various Sizes Available

Applications:

Product Application Occasions and Scenarios for the Aluminum Heatsink:

The Aluminum Heatsink, made from alloy 6063, is a versatile cooling solution suitable for a variety of applications. With its excellent heat dissipation properties, this product is commonly used in LED lighting fixtures, power stations, and other electronic devices that require efficient thermal management.

Whether for commercial or industrial use, the Aluminum Heatsink from No Brand in China, Guangdong, offers reliable performance and durability. Its various sizes available make it adaptable to different product designs and requirements.

The surface treatment options, including anodized and customized finishes, allow for enhanced aesthetics and protection against corrosion. The product is packaged with protective film to ensure its quality during delivery, which typically takes 15-30 days.

For customers' convenience, payment terms such as L/C and T/T are accepted, making the purchasing process smooth and flexible. Additionally, sample leadtime is only 15 days, enabling quick evaluation of the product's compatibility with specific requirements.

In summary, the Aluminum Heatsink is a reliable cooling solution suitable for a wide range of applications, including LED lighting, power stations, and other electronic devices. Its quality construction, customizable features, and efficient heat dissipation make it a valuable component in various industries.



Golden Chain Products Industrial Co., Ltd.



+86 13823492359



cherry@jkd888.com



alu-heatsink.com