



Universal Compatibility LED Lighting Aluminum Heatsink High Durability for Any Application

Our Product Introduction

for more products please visit us on alu-heatsink.com


Basic Information

- Place of Origin: China, Guangdong
- Brand Name: No Brand
- Packaging Details: protect film
- Delivery Time: 15-30days
- Payment Terms: L/C, T/T




Product Specification

- Sample: Available
- Mounting Type: Vertical
- Dimensions: Various Sizes Available
- Alloy: 6063
- Surface Treatmentment: Anodized, Customized
- Sample Leadtime: 15 Days
- Thermal Conductivity: High
- Compatibility: Universal
- Highlight: **High Durability Aluminum Heatsink, Aluminum Heatsink for LED Lighting**

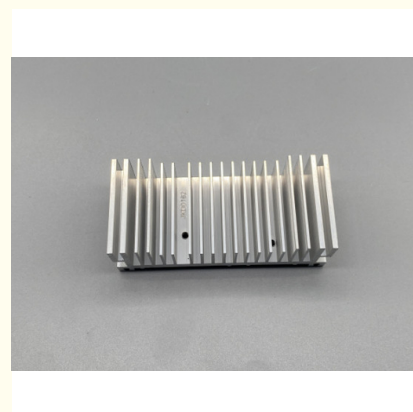

More Images



Product Description

Product Description:

Introducing our high-quality Aluminum Heatsink, a premium cooling solution designed to effectively dissipate heat and maintain optimal operating temperatures for LED lighting systems. With its innovative design and exceptional performance, this heatsink is the perfect choice for various applications in the LED lighting industry.

Available in various sizes to suit different requirements, our Aluminum Heatsink offers versatility and flexibility for installation in a wide range of LED lighting fixtures. The customizable dimensions ensure a perfect fit for your specific needs, allowing for efficient heat dissipation and enhanced thermal management.

The surface treatment of this heatsink is meticulously done with anodized coating, providing not only a sleek and professional finish but also enhanced durability and corrosion resistance. Customization options are also available, allowing you to personalize the heatsink to match your unique design preferences and requirements.

Designed for vertical mounting, this Aluminum Heatsink offers easy installation and secure attachment to LED lighting systems. The vertical mounting type ensures stable positioning and efficient heat transfer, maximizing the performance and longevity of the LED fixtures.

Our Aluminum Heatsink is universally compatible, making it suitable for a wide range of LED lighting applications. Whether you are using it for residential, commercial, or industrial lighting projects, this heatsink provides reliable and effective thermal management to ensure the optimal performance of your LED lighting systems.

With a high thermal conductivity rating, this heatsink is specifically engineered to efficiently transfer heat away from LED components, preventing overheating and maintaining the longevity and reliability of the lighting fixtures. The excellent thermal conductivity of the Aluminum Heatsink ensures consistent and uniform cooling, even under demanding operating conditions.

Whether you are looking to enhance the performance of your LED lighting systems, improve thermal management, or extend the lifespan of your LED fixtures, our Aluminum Heatsink is the ideal solution. Its superior design, customizable features, and high thermal conductivity make it a top choice for professionals and enthusiasts in the LED lighting industry.

Invest in our Aluminum Heatsink today and experience the difference in LED heat dissipation and thermal control. Elevate the performance and reliability of your LED lighting installations with this premium heatsink designed to meet the highest standards of quality and efficiency.

Features:

Product Name: Aluminum Heatsink

Durability: High

Dimensions: Various Sizes Available

Sample: Available

Mounting Type: Vertical

Thermal Conductivity: High

Technical Parameters:

| | |
|----------------------|-------------------------|
| Alloy | 6063 |
| Sample | Available |
| Mounting Type | Vertical |
| Sample Leadtime | 15 Days |
| Surface Treatment | Anodized, Customized |
| Compatibility | Universal |
| Dimensions | Various Sizes Available |
| Durability | High |
| Thermal Conductivity | High |

Applications:

When it comes to efficient heat dissipation for LED lighting applications, the Aluminum Heatsink from No Brand is the perfect solution. Designed and manufactured in China, Guangdong, this heatsink is crafted to deliver high thermal conductivity, ensuring optimal performance and longevity for your LED fixtures.

Whether you are working on indoor or outdoor LED lighting projects, this Aluminum Heatsink is suitable for a wide range of product application occasions and scenarios. From commercial buildings and residential spaces to industrial warehouses and outdoor landscapes, this heatsink is versatile and reliable.

The packaging details include a protective film to safeguard the heatsink during transportation and storage, while the delivery time ranges from 15 to 30 days, depending on your location and order quantity. For payment terms, both L/C and T/T are accepted, providing flexibility and convenience for your procurement process.

With a vertical mounting type, the Aluminum Heatsink offers easy installation and compatibility with various LED fixtures. The surface treatment options include anodized finish and customization, allowing you to achieve the desired look and performance for your specific project requirements.

If you need to evaluate the product firsthand, samples are available with a lead time of 15 days. This enables you to test the heatsink's

compatibility and performance before making a larger purchase. Whether you are a lighting designer, manufacturer, or distributor, this Aluminum Heatsink is a reliable choice for your LED heat sink needs.

Customization:

Product Customization Services for Aluminum Heatsink:

- Brand Name: No Brand
- Place of Origin: China, Guangdong
- Packaging Details: protect film
- Delivery Time: 15-30days
- Payment Terms: L/C, T/T
- Surface Treatmentment: Anodized, Customized
- Sample: Available
- Alloy: 6063
- Mounting Type: Vertical
- Sample Leadtime: 15 Days

Packing and Shipping:

Product Packaging:

The Aluminum Heatsink is carefully packaged in a sturdy cardboard box to ensure safe delivery.

Shipping:

Ocean, Air, Express



Golden Chain Products Industrial Co., Ltd.



+86 13823492359



cherry@jkd888.com



alu-heatsink.com