




6063 Alloy Universal Compatibility Aluminum Heatsink with Anodized Surface Treatmentment

Our Product Introduction

for more products please visit us on alu-heatsink.com


Basic Information

- Place of Origin: China, Guangdong
- Brand Name: No Brand
- Packaging Details: protect film
- Delivery Time: 15-30days
- Payment Terms: L/C, T/T

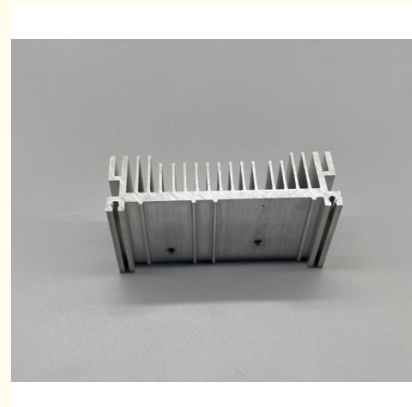

Product Specification

- Alloy: 6063
- Compatibility: Universal
- Durability: High
- Sample Leadtime: 15 Days
- Thermal Conductivity: High
- Sample: Available
- Dimensions: Various Sizes Available
- Surface Treatmentment: Anodized, Customized
- Highlight: **Anodized Surface Treatment Aluminum Heatsink**
, Universal Compatibility Aluminum Heatsink,
6063 Alloy Aluminum Heatsink

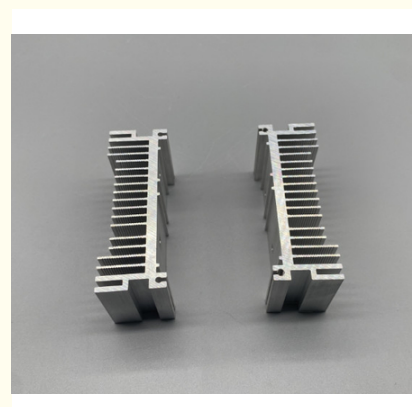

More Images



Product Description

Product Description:

The Aluminum Heatsink is a crucial component for various applications, providing efficient thermal management to ensure optimal performance and longevity of electronic devices. With a high thermal conductivity, this heatsink effectively transfers heat away from sensitive components such as LED lighting systems and power stations, enhancing their overall reliability and efficiency.

Constructed from high-quality 6063 alloy, this heatsink boasts exceptional durability, capable of withstanding demanding environments and extended usage. The anodized surface treatment further enhances its resilience, providing protection against corrosion and wear, ensuring a long service life even in harsh operating conditions.

Available in various sizes, the Aluminum Heatsink offers versatile options to accommodate different requirements and space constraints. Whether it's for compact LED lighting fixtures or larger power station equipment, there is a suitable size to meet your specific needs and configurations.

When it comes to thermal management, the Aluminum Heatsink excels in efficiently dissipating heat generated by LED lighting systems, power stations, and other heat-generating devices. By effectively regulating the temperature and preventing overheating, this heatsink plays a crucial role in maintaining the performance and reliability of such equipment, ensuring optimal operation and longevity.

Whether you are looking to upgrade the thermal management of your LED lighting installations or enhance the performance of power station components, the Aluminum Heatsink offers a reliable solution with its high thermal conductivity, customized surface treatment options, durability, and range of available sizes. Invest in this heatsink to optimize the efficiency and reliability of your electronic devices and equipment.

Features:

Product Name: Aluminum Heatsink

Mounting Type: Vertical

Durability: High

Thermal Conductivity: High

Sample: Available

Compatibility: Universal

Technical Parameters:

Surface Treatment	Anodized, Customized
Sample Leadtime	15 Days
Mounting Type	Vertical
Durability	High
Sample	Available
Compatibility	Universal
Thermal Conductivity	High
Alloy	6063
Dimensions	Various Sizes Available

Applications:

Aluminum heat sinks are essential components in various industries and applications due to their high durability and excellent thermal conductivity. The aluminum heat sink offered by No Brand, originating from China, Guangdong, is a top-quality product designed to effectively dissipate heat and maintain optimal operating temperatures.

One of the key application occasions for this aluminum heat sink is in LED lighting systems. LED lights are known for their energy efficiency and long lifespan, but they also generate heat during operation. By incorporating the aluminum heat sink, the heat generated by the LED lights can be efficiently dissipated, ensuring the longevity and performance of the lighting system.

Another ideal scenario for using this aluminum heat sink is in power stations. Power stations house a wide range of equipment and machinery that generate heat during operation. By installing the aluminum heat sink, heat dissipation can be improved, preventing overheating and potential damage to critical components within the power station.

The aluminum heat sink is made from high-quality 6063 alloy and is packaged with protective film for added safety during transportation. With a delivery time of 15-30 days and payment terms including L/C and T/T, customers can easily procure this essential component for their applications.

In addition, samples are available with a lead time of 15 days, allowing customers to evaluate the product before making a larger purchase. The high durability and thermal conductivity of the aluminum heat sink make it a reliable choice for various industries requiring effective heat dissipation solutions.

Customization:

Product Customization Services for Aluminum Heatsink:

Brand Name: No Brand
Place of Origin: China, Guangdong
Packaging Details: protect film
Delivery Time: 15-30 days
Payment Terms: L/C, T/T
Compatibility: Universal
Dimensions: Various Sizes Available
Surface Treatment: Anodized, Customized
Mounting Type: Vertical
Sample Leadtime: 15 Days

Packing and Shipping:

Product Packaging:
The Aluminum Heatsink is carefully packaged in a sturdy cardboard box to ensure safe delivery.
Shipping:
Ocean, Air, Express



Golden Chain Products Industrial Co., Ltd.



+86 13823492359



cherry@jkd888.com



alu-heatsink.com