




## Customizable Aluminum Heatsink for Diverse Customer Requirements

### Our Product Introduction

#### Basic Information

- Place of Origin: China, Guangdong
- Packaging Details: protect film
- Delivery Time: 15-30days
- Payment Terms: L/C, T/T

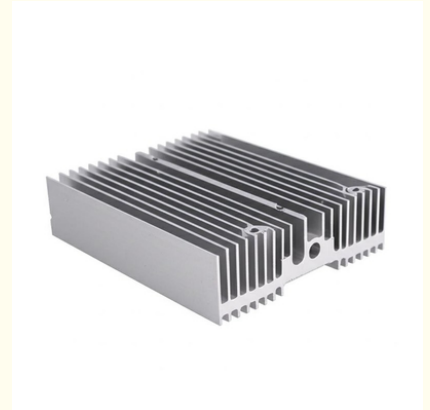

#### Product Specification

- Dimensions: Various Sizes Available
- Sample: Available
- Compatibility: Universal
- Thermal Conductivity: High
- Sample Leadtime: 15 Days
- Surface Treatmentment: Anodized, Customized
- Mounting Type: Vertical
- Durability: High
- Highlight: customizable aluminum heatsink,  
aluminum heatsink for diverse needs,  
custom heatsink with warranty

for more products please visit us on [alu-heatsink.com](http://alu-heatsink.com)

## Product Description

### Product Description:

The Aluminum Heatsink is a high-quality product designed for efficient heat dissipation in various applications. It is compatible with a wide range of devices and systems, making it a universal solution for heat management. Crafted from durable 6063 alloy, this heatsink offers excellent thermal conductivity and corrosion resistance, ensuring long-lasting performance.

The surface treatment of this heatsink includes anodizing, which provides a protective layer that enhances its durability and appearance.

Additionally, the heatsink can be customized to meet specific requirements, allowing for personalized finishes and branding options.

With a sample lead time of 15 days, customers can quickly assess the quality and suitability of this heatsink for their specific needs. The quick turnaround time ensures that projects can progress smoothly without unnecessary delays.

Available in various sizes, the Aluminum Heatsink offers versatility in application, catering to different thermal management requirements. Whether used in electronics, LED lighting, power stations, or other heat-generating systems, this heatsink extrusion provides an effective solution for dissipating excess heat and maintaining optimal operating temperatures.

Designed for efficiency and performance, the Aluminum Heatsink is a reliable choice for applications that demand effective heat dissipation. Its 6063 alloy construction ensures a balance of strength and thermal conductivity, making it ideal for use in demanding environments such as power stations and industrial settings.

Whether you require standard sizes or custom dimensions, this heatsink extrusion can be tailored to suit your specific needs. The anodized surface treatment not only enhances the heatsink's durability but also allows for a personalized finish that aligns with your brand or design requirements.

Investing in the Aluminum Heatsink means investing in quality, reliability, and efficiency. Its compatibility with a wide range of devices and systems, along with its customizable features, makes it a versatile solution for various heat management challenges. With quick sample lead times and a range of sizes available, this heatsink extrusion is ready to meet your thermal management needs.

### Features:

Product Name: Aluminum Heatsink

Alloy: 6063

Durability: High

Sample Leadtime: 15 Days

Surface Treatment: Anodized, Customized

Dimensions: Various Sizes Available

### Technical Parameters:

Surface Treatment	Anodized, Customized
Durability	High
Thermal Conductivity	High
Sample	Available
Sample Leadtime	15 Days
Compatibility	Universal
Mounting Type	Vertical
Alloy	6063
Dimensions	Various Sizes Available

### Applications:

The Aluminum Heatsink product, originating from China, Guangdong, is a versatile cooling solution suitable for a variety of applications due to its high thermal conductivity and durability. Its compatibility with various devices makes it a universal choice for both industrial and consumer use.

One of the key product application occasions for the Aluminum Heatsink is in power stations. The heat sink extrusion design efficiently dissipates heat generated by power generation equipment, ensuring optimal performance and preventing overheating.

Furthermore, the Aluminum Heatsink is ideal for scenarios requiring vertical mounting thanks to its design. This makes it perfect for use in vertical-oriented devices or systems where effective heat dissipation is crucial for maintaining performance and longevity.

With various sizes available, the Aluminum Heatsink can be tailored to suit specific requirements, providing flexibility in installation and compatibility with different devices. The product is packaged with a protective film to prevent damage during transit and has a delivery time of 15-30 days, ensuring timely availability.

Customers can make payments through L/C or T/T, offering convenience and security in transactions. Whether for industrial applications or consumer electronics, the Aluminum Heatsink offers a reliable cooling solution that meets the demands of diverse scenarios.



**Golden Chain Products Industrial Co., Ltd.**



+86 13823492359



cherry@jkd888.com



alu-heatsink.com